



FLUID LEVEL GAUGE


(MODEL: SGR - 3, 5, 7, 10, 14)

TECHNICAL DATA

Hydax introduces a newly designed Fluid Level Gauge of robust construction, bigger size and 'O' Ring sealing made from aluminum and glass-filled nylon. These level gauges are easy to install. Supplied in ready assembled condition it needs drilling of 2 holes to install the gauges. Surface on which it is being installed should be level and of smooth finish. Sizes available are 76mm, 127mm, 178mm, 254mm and 356mm between bolt centers. These Level Gauges also have the options of heat dial / thermometer temperature indicator.

SILENT FEATURES

1. Supplied in ready assembled condition, requiring only drilling of 2 holes making it easy to install.
2. Available in 5 sizes; 3", 5", 7", 10", 14" between bolt centers.
3. Based on O ring sealing, requiring no additional plate for installation.
4. Made from glass filled nylon and or aluminum to provide a robust structure.
5. Options of thermometer (SGRT) and heat dial (SGRD) temperature indicators.
6. The temperature scale is in between 30°C to 80°C.

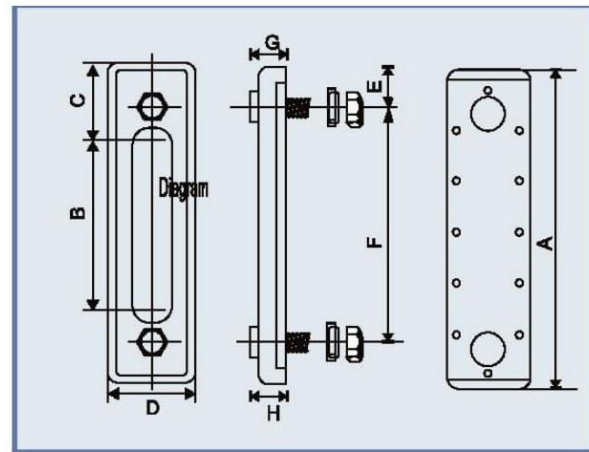

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Bolt Thread	Fixing Hole O mm	Temperature Range Deg C Deg F		Weight in Kgs
SGR-3	127	45	41	50	25.5	76	47	23	M-12	12.5	30 - 80	86 - 176	0.265
SGRT-3	127	45	41	50	25.5	76	47	23	M-12	12.5			0.247
SGRD-3	127	45	41	50	25.5	76	47	23	M-12	12.5			0.25
SGR-5	172	90	41	64	22.5	127	47	23	M-12	12.5			0.35
SGRT-5	172	90	41	64	22.5	127	47	23	M-12	12.5			0.33
SGRD-5	172	90	41	64	22.5	127	47	23	M-12	12.5			0.35
SGR-7	240	130	55	63	31	178	50	23	M-12	13			0.53
SGRT-7	240	130	55	63	31	178	50	23	M-12	13			0.7
SGRD-7	240	130	55	63	31	178	50	23	M-12	13			0.7
SGR-10	350	180	85	76	48	254	53	25	M-16	17			2.0
SGRT-10	350	180	85	76	48	254	53	25	M-16	17			2.0
SGRD-10	350	180	85	76	48	254	53	25	M-16	17			2.0
SGR-14	450	280	85	76	47	356	53	25	M-20	21			2.73
SGRT-14	450	280	85	76	47	356	53	25	M-20	21			2.73
SGRD-14	450	280	85	76	47	356	53	25	M-20	21			2.73