



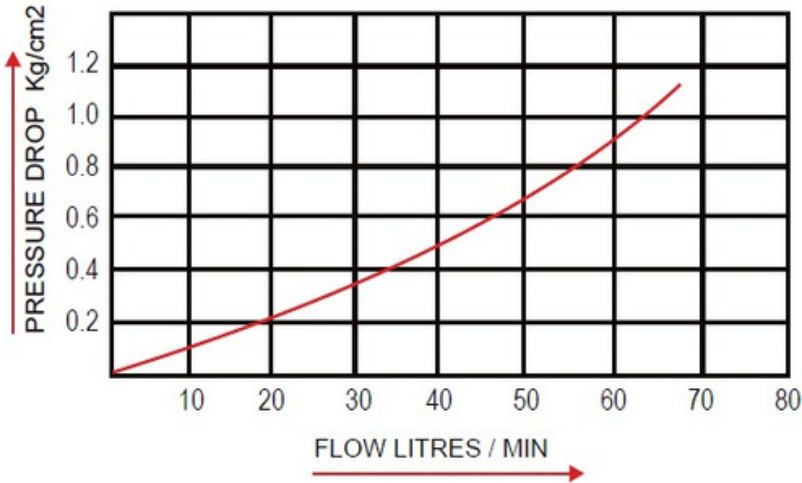

IN LINE FILTER

(Model: ILF)

- ILF is available from flows of 60LPM to 130LPM.
- Maximum operating pressure is 15 Kg/cm.
- ILF used for all types of mineral and Petroleum-based hydraulic fluids.
- The body and cover are made of high grade cast iron.
- Filter element is available in Stainless steel wire mesh or high impregnated paper filter and 25 microns filtration are standard (Optional is 10 microns).
- The built-in by-pass valve opens when the filter element is clogged.
- Permanent magnets inside the filter keeps ferrous particles out of the System. In-line mounting.

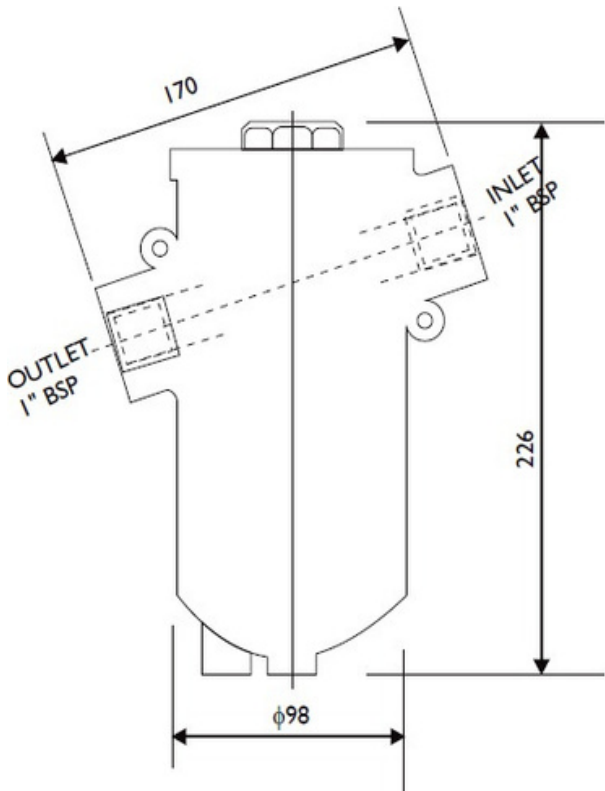

MODEL CODE	FILTRATION CAPACITY (MICRONS)	FLOW CAPACITY LPM	PRESSURE MAX kg/cm2
ILF 06 - 08 -10	10	60	15
ILF 75 - 08 - 25	25	75	15
ILF 130 - 08 - 25	25	130	15