






PRESSURE LINE FILTERS (MODEL: PLF - 03-")

The highly compact Pressure Line Filter is ideal for applications in simpler hydraulic systems. It provides reliable protection to dirt sensitive components. Due to the use of a sintered bronze filter cartridge, it provides absolute filtration.

The body and cover are made of high strength castings with nitrile rubber seal. The filtration elements are available in 10, 25 & 75 micron ratings respectively. To prevent any contamination gaining entry into the system, no by-pass valve is provided. The maximum working pressure is 140 bar and the capacity is 20 LPM

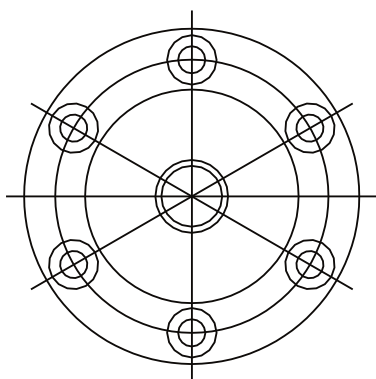

OUT LINE Drg. Of 'PLF'

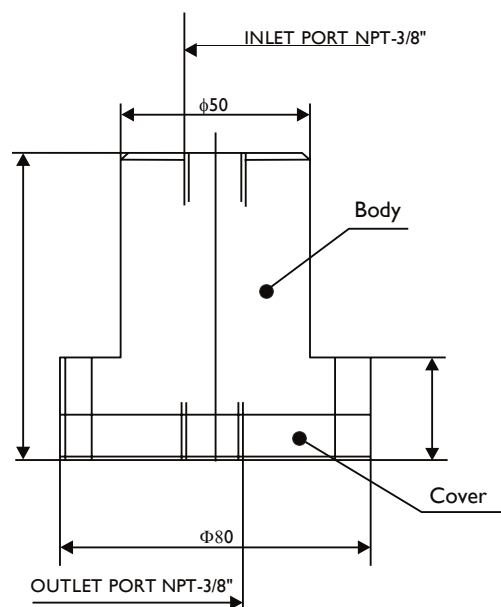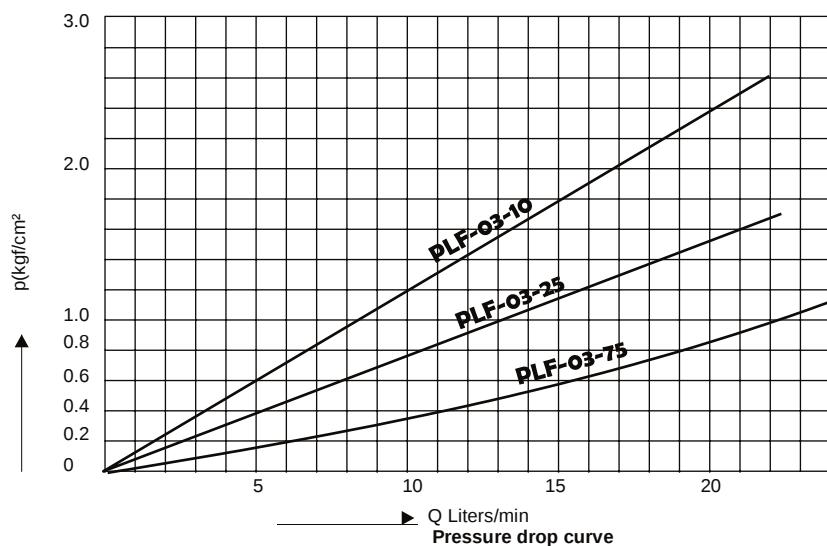

MODEL CODE	FILTRATION CAPACITY (Microns)
PLF-03-10	10
PLF-03-25	25
PLF-03-75	75

CAPACITY: 20 LPM
PRESSURE: 140 Kg/Cm²

Warning

The filter elements are likely to clog faster, because of absolute filtration and the absence of a by-pass valve. Therefore, the use of higher micron (75) filtering elements are recommended, especially where a very high degree of system cleanliness is not maintained.