




## THREADED BREATHER (MODEL: BT)

### TECHNICAL DATA

This is a unit for filtering air displacement from the reservoir. Displacement capacity is from 250 LPM to 700 LPM and filtration is upto 5 microns (Standard supply : 40 microns). The air displacement from underneath the cap assembly improves performance. Powder Coated finish ensures Corrosion resistance. For use with Hydraulic/Lubrication oil reservoirs. Gear box applications include machine tools, mobile equipment, industrial machinery, etc.

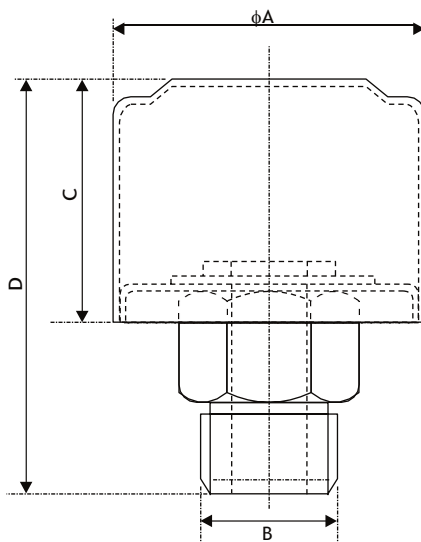

| MODEL        | A     | B THREAD | C     | D     |
|--------------|-------|----------|-------|-------|
| BT 250 UM 40 | 45 mm | 1/4" BSP | 38 mm | 62 mm |
| BT 250 UM 40 | 45 mm | 1/2" BSP | 38 mm | 62 mm |
| BT 700 UM 40 | 76 mm | M-12     | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | M-26     | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | M-30     | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | M-34     | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | 1/2" BSP | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | 3/4" BSP | 48 mm | 82 mm |
| BT 700 UM 40 | 76 mm | 1" BSP   | 48 mm | 82 mm |