


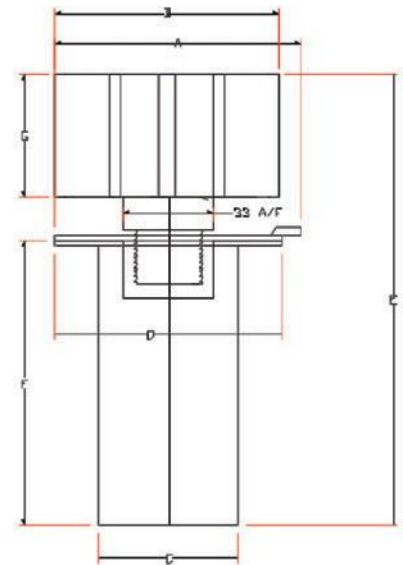

FILLER BREATHER ASSEMBLY (Nylon)

FBN 700 TT 40
FBN 700 SM 40
FBN 250 SM 40


Model	Dimensions (MM)						
	A	B	C	D	E	F	G
FBN 700 TT 40	90	82	50	82.5	155	95	60

This assembly is a combination unit for filtering air displacement from the reservoir and straining oil while filling. It is for use with Hydraulic/Lubrication oil reservoir applications, including machine tools, mobile equipment, industrial machinery, construction, mining, marine and agricultural applications etc. Breather-filters are a must for hydraulic systems ensuring clean air and oil passing into the reservoir, thus prolonging the life of the system components. When used as a crankcase ventilator, it helps to prolong the life of the engine oil and the oil filter.

Features:

- Mounting options are Tank Top and Side Mounting.
- The displacement capacity is available in 250 LPM and 700 LPM and filtration is upto 40 microns.
- Entire body is light weight and corrosion resistant.
- It is a complete, ready-to-install assembly with internal safety chain and fasteners.
- The mounting surface should be flat, clean and free of burrs to provide a good sealing surface for the flange.
- Specially designed slots provide for an extremely large amount of airflow through the cap.
- It is compatible with all fluids.
- Filtration upto 5 microns available (Standard supply: 40 microns).
- Slotted holes in strainer and flange allow for easier alignment during installation.
- Grooved design allows for better grip.

MODEL

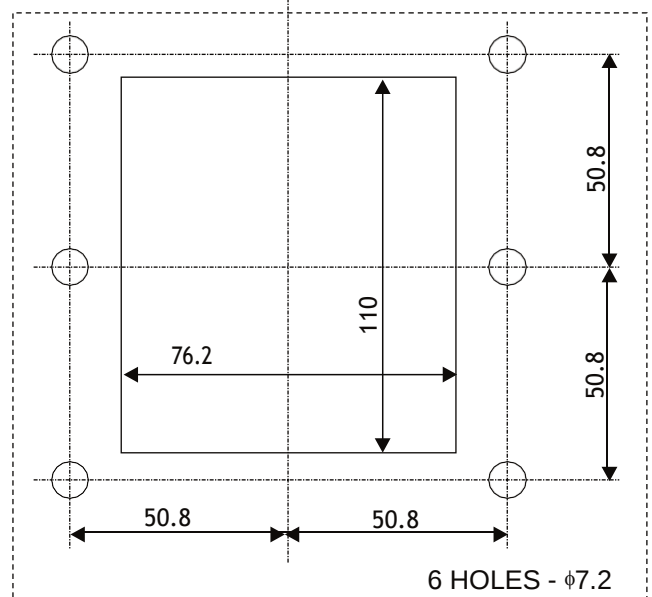

Details for side mounting

HYDAX HYDRAULICS PVT. LTD.

Plot No: 22B, Attibele Industrial Area, Anekal Taluk, Bangalore 562107. India Tel: +91 99160 70034 / 95134 99976 Mob: +91 9731274120
Email: info@hydaxindia.com | sales@hydaxindia.com | machines@hydaxindia.com,
Website: www.hydaxindia.com | www.hydaxmachines.com